


## PRODUCT INFORMATION SHEET

# Battery floodlight set with tripod

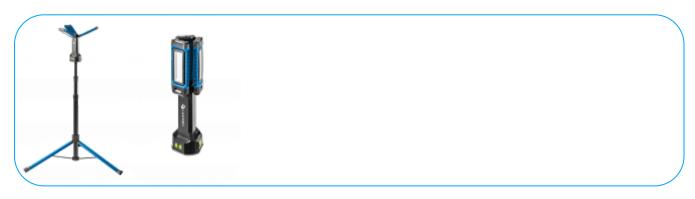

#### **Product description**

Set of a battery floodlight and a tripod. Omnidirectional work lighting, which is characterised by very good quality of emitted light and high resistance and durability. With a 360° light beam and an individual beam angle setting of each of the 3 reflectors, it offers great possibilities of adapting it to current needs and conditions. High-quality LEDs shine with white light, without dazzling and providing extensive illumination. It is suitable for work in the most difficult conditions - construction, finishing, renovation, workshops and outdoors. The lamp is powered by an efficient battery, ensuring continuous operation for up to 7 hours. If necessary, it can be removed from the tripod, and thanks to strong magnets or a foldable hook for hanging, it can be mounted anywhere. A socket with a 1/4" thread allows the floodlight to be mounted on a tripod. The housing with a high IP54 rating guarantees full resistance to dust ingress, ensuring trouble-free operation in the dustiest environments. Additionally, the housing protects against splashing water from any direction, which allows it to be used safely even in heavy rain. High-quality, durable housing material with IK09 rating - resistance to impact energy of 10 J, protects the floodlight against mechanical damage in the event of a fall. If necessary, the floodlight can power other devices via a USB-C port and work as a power bank. The tripod made of aluminium guarantees that it is lightweight and resistant to corrosion and mechanical damage to ensure long-term durability. The foldable design allows it to be folded into a convenient and compact size for easy transportation. A comfortable bag allows the set to be packed.

#### Characteristics

The set includes: floodlight + tripod + bag.

FLOODLIGHT:

Max. luminous flux - 7000 lm;

Main light source - 10 W COB LED, 6.500 K;

Three operating modes - luminous flux / operating time:

- 1. 7,000 lms / 1.5 h / 58 m, 120°,
- 2. 4,000 lms / 3.5 h / 25 m, 40°,
- 3. 1,500 lm / 7 h / 15 m, 120°,

Impact protection class - IK07 (equivalent to an impact of a 500 g object from a height of 40 cm);

Dust and waterproof class - IP54 (protection against splashing water from any direction);

Power supply - Li-Ion battery, 2\*21.700, 7.4 V, 4.000 mAh;

Max. working time - 7 h;

Max. charging time - 7 h;

Head tilt adjustment - yes;

Mounting - magnets, hook for hanging, 1/4" socket;

Charging port - USB-C.

Head size - 210\*100\*95mm.

TRIPOD:

height when unfolded - 150 cm;

height after folding - 60.5 cm;

base spacing - 86 cm:

mounting bracket - 1/4"; material – Alu+ABS+PC.

### Technical data

HÖDERT			
HT1E450	5902801448461	0	0

Högert Technik GmbH, Pariser Platz 6a, 10117 Berlin, Deutschland

Producent/ Manufacturer/ Hersteller/ Произведено для:

PL GTV Poland S.A., ul. Przejazdowa 21 05-800 Pruszków, Polska/ Poland/ Polen/ Польша

Importer/ Импортер: HR GTV Croatia d o.o.; Kovinska 4s, 10000 Zagreb, Hrvatska Distributor:

- Distributor: ES GTV España Herrajes, E Iluminación, S.L., Avenida Aragón 308, 46021 Valencia, Spain CZ GTV Czech Distribution s.r.o., CTPark Ostrava, Na Rovince 879, 720 00 Ostrava Hrabová

www.hoegert.com